NUVONIC

formerly Aquionics, Berson, Hanovia and Orca GmbH

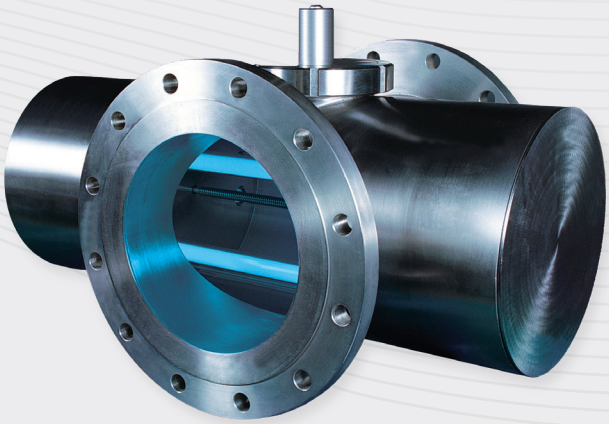

UV Swim I

OPTIMIZED UV TREATMENT FOR POOLS AND SPAS

Our **UV Swim-I** systems are validated in accordance to NSF50 and USEPA UVDGM and meet the MAHC (Model Aquatic Health Code) guidelines.

They are optimised to deliver secondary disinfection for all leisure facilities from spas to large competition pools. They are also designed to break down combined chlorine (chloramine) which are responsible for eye and skin irritation, headaches and unpleasant odours.

This systems also has the added advantage of being effective against chlorine resistant Cryptosporidium and is up to 5 times cheaper to maintain ands occupies only 1/10th of the space of ozonation equipment.

Application
Optimized UV for
Pools & Leisure

UV SWIM I FLOW DIAGRAM FOR SINGLE POOL WITH UV TREATMENT

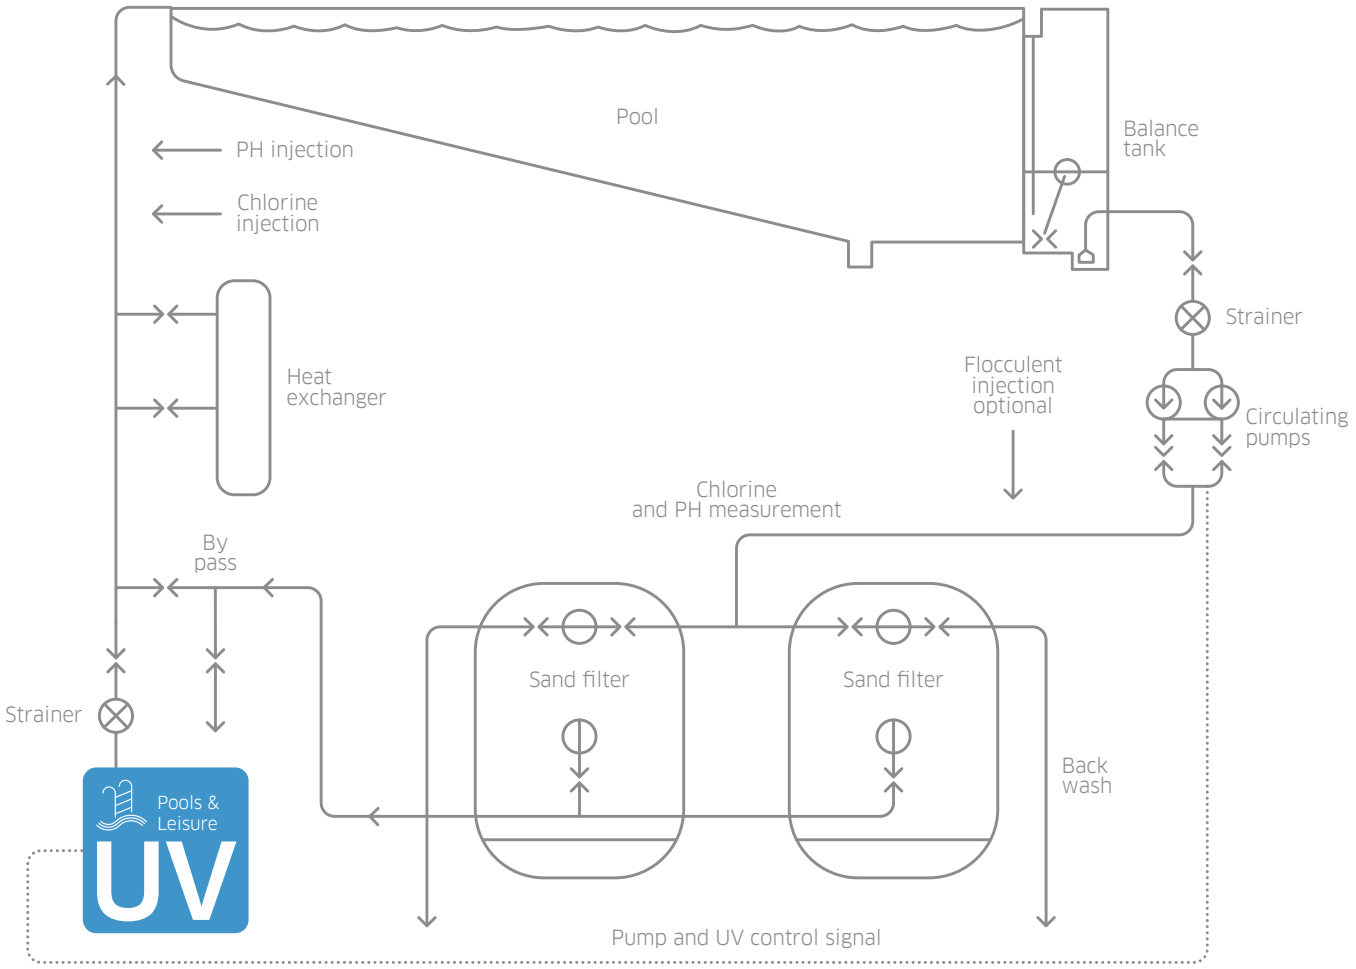

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
INTELLIGENCE		
Dry DVGW approved UV sensor measuring active wavelengths	Continuous verification of performance with in-built low intensity alarm	Easy to monitor and log system performance
Flow meter input	Stepless adjustment of lamp power based on real time operating conditions	Optimized use of energy, saving operating costs
OPTIMIZATION		
Medium pressure lamps	Provides UV light at 200 to 400 nm wavelengths ideal for the destruction of mono-, di- and trichloramine	Visibly clear water with reduced odours
		Reduced corrosion risk
		Minimizes bathers' eye and skin irritation
	Provides active wavelengths to treat the water	Protects bathers from chlorine resistant Cryptosporidium and Giardia
	Lower maintenance cost and maintenance time	Reduced operating costs
Automatic wiper (quartz cleaning)	Self cleaning	
INTEGRATION		
Designed specifically for pools	Compact design	Easy integration

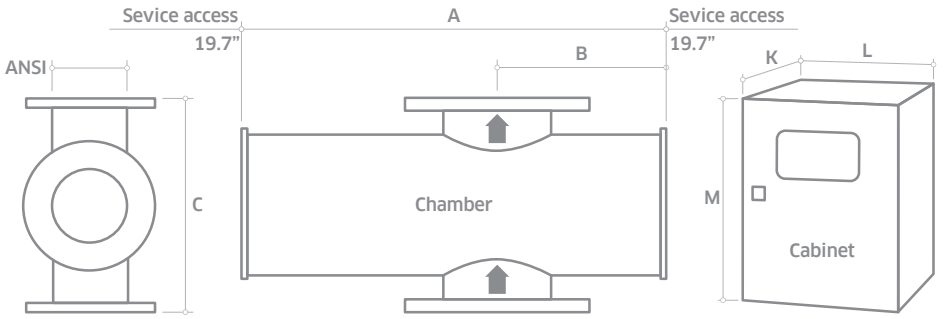

** Allow dimension L in front of cabinet for door opening and panel access.

*** M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 9.8”).

**** CC: Control cabinet, PC: Power cabinet

[a] Attention: the optional cabinet with A/C is bigger. Ask for dimensions.

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request.

All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

MODEL NUMBER	MAX FLOW (GPM) NSF50	MAX POWER (KW)	NO OF LAMPS	APPROX DIMENSIONS (INCHES)								APPROX WEIGHT (LB)		FLA BASED ON VOTAGE			BREAKER (A) BASED ON VOLTAGE		
				Chamber				Cab.	Cabinet (fan cooled)[a]			Chamber	Cabinet						
				A	B	C	ANSI	No****	K**	L	M***	Empty	Fan cooled	208, 3ph	230V 1ph +N	480/ 277V 3ph+N	208, 3ph	230V 1ph +N	480/ 277V 3ph+N
UV Swim I-100+	123.3	1.7	2	30.7	12.2	15.7	4	1	11.8	31.5	39.4	92.6	110.2	9.19	9.59	7.96	12	12	10
UV Swim I-200+	352.2	2.5	1	30.7	12.2	15.7	6	1	11.8	31.5	39.4	110.2	121.3	13.72	14.32	11.89	20	20	15
UV Swim I-450+	748.5	5	2	30.7	12.2	15.7	8	1	11.8	39.4	47.2	172	176.4	27.87	32.36	12.09	35	45	20
UV Swim I-1000+	1585	10	4	30.7	12.2	15.7	8	1	11.8	39.4	47.2	172	220.5	41.38	58.62	22.98	60	80	30
UV Swim I-4000+	5069	16	4	35.3	14.5	21.7	14	1	23.6	39.4	79.13	330.7	396.8	*(480V) 37.05			*(480V) 50		

* UV Swim I-4000+ based on 480V (3ph)

NOTE: Disinfection efficacy for ≥ 3 log reduction of Cryptosporidium parvum in accordance with NSF50 and USEPA UVDGM, and is intended for ***secondary disinfection.***

UV CHAMBER

Material:	Stainless steel 316L / 1.4404
Internal finish:	< 0.8 µm Ra, welds ground out, electropolished and passivated
External finish:	Brushed to K280, electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN10, ANSI 150
Drain connection:	NPT
End plate:	Removable end plate
Degree of protection:	IP54 equivalent to NEMA 12, but not for outside use
Wiper:	Automatic (electrically driven)
UV Lamp:	Medium pressure
Quartz Sleeve:	Doped quartz (F240)
Expected lamp life:	8,000 hours
Temperature sensor:	Yes
UV sensor:	Dry DVGW compliant UV sensor
Working fluid temperature:	33.8˚F to 140˚F
Hydrostatically pressure tested:	Yes
Chamber mounting:	Flow horizontal or vertical (lamps horizontal only)
Operating pressure:	6 bar
Seals:	EPDM, ADI free, EC 1935/2004, FDA 21 CFR 177.2600 approved

OPTIONS

- Document Support Pack
- Cabinet material: Stainless steel 304 IP56 (NEMA 4x)
- Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German & Spanish
- Flange options: PN16, ANSI 150, JIS, Table ‘E’ and tri-clamp
- Lead length: 65.5 ft and 95.1 ft
- In-field UV reference sensor kit
- Aggressive water package: For 400 ppm to 20000 ppm chloride water
- Control cabinet: Air conditioning in stainless steel raises control ambient limit to 122˚F (in shade) IP rating 65 (NEMA 4X)
- Water leak detection: Detects water leaks from quartz sleeve
- Water level sensor: UV chamber full water detection

CABINET (FAN COOLED)

Material:	Polyester coated carbon steel, RAL 7035
Degree of protection:	IP54 (NEMA 12)
Operating temperature range:	41˚F to 95˚F
Relative humidity:	<95% non-condensing
Cooling fans:	Yes
Interconnecting cable:	32.8 ft to chamber
Variable power:	Stepless variable power (70% reduction from maximum ballast power)

HMI/CONTROL

Display:	4 line LCD, indicating system status including alarms
Operating menu:	3 levels (2 with password protection)
Fault finding:	Event log

CUSTOMER OUTPUTS

4-20 mA passive output:	UV intensity, ballast power
VFC outputs:	Standby in remote, system standby, system cooling down, any trip, any warning, UV intensity failure, system ready, wiper failure, lamp failure, water leak, water temperature warning, water & cabinet temperature alarm

CUSTOMER INPUTS

4-20 mA active or passive inputs:	Flow meter, UVT meter
VFC inputs:	Remote stop/start, remote clear message, remote wipe, remote set power high

CUSTOMER COMMUNICATIONS PORT

Modbus RS 485 serial RTU for SCADA connection

APPROVALS

UL 508A shop, CE Marked, MAHC, NSF50 (Secondary Disinfection)
USEPA UVDGM (I-450+ to I-4000+), DVGW (I-100+ and I-200+)

UV Swim I

Also available in our Pools & Leisure product range...

Standard treatment and dechloramination

Mexico
+1 980 256 5700
americas@nuvonicuv.com

USA
+1 980 256 5700
americas@nuvonicuv.com

Canada
+1 980 256 5700
americas@nuvonicuv.com

NUVONIC

A Halma company

formerly Aquionics, Berson, Hanovia and Orca GmbH

nuvonicuv.com

©2023 Nuvonic 910430-3400-06-US

FM 29365